

UV-Air[®] Probe with 4-20mA Output and UVC Photodiode (SiC)

Part Number: UV_Air_C_AMP4-20mA_cable



Our probes from the **UV-Air[®]** series are characterized by a solid and compact design. A male thread allows various mounting possibilities at the measuring point.



UV_Air_C_AMP4-20mA_cable

Features of UV_Air_C_AMP4-20mA_cable :

- only for UVC measurement, e.g. for purification control, spectral sensitivity according to DVGW W294-3
- filtered, silicon carbide (SiC) based UV photodiode for extreme radiation hardness
- integrated amplifier with 4...20mA output
- offset and amplification factor are adjustable
- with M22 thread for comfortable mounting
- handy and solid stainless steel housing, IP65 at back
- with teflon diffuser for cosine correction
- 2m shielded cable

Probes from the **UV-Air[®]** series are available with the following details:

<i>Sensortype</i>	<i>Part Number</i>
with broadband photodiode	UV_Air_ABC_Design
with UVC photodiode DVGW W 294-3	UV_Air_C_Design
with Erythema Sensor DIN 5050 ISO 17166/CIE S 007/E	UV_Air_UV-Index_Design

<i>Design</i>	<i>Part Number</i>
with 4-20mA output and 2m cable	UV_Air_Sensortype_AMP4-20mA_cable
with 4-20mA output and 5 pin connector	UV_Air_Sensortype_AMP4-20mA_plug
with 0-5V output and 2m cable	UV_Air_Sensortype_AMP0-5V_cable
with 0-5V output and 5 pin connector	UV_Air_Sensortype_AMP0-5V_plug
without amplifier	UV_Air_Sensortype_cable

Please consider the following probe series:

- UV-Water (10bar water pressure resistant)

UV-Air[®] Probe with 4-20mA Output and UVC Photodiode (SiC)

Part Number: UV_Air_C_AMP4-20mA_cable



- UV-Cosine (with wide angle characteristic, cosine correction)
- UV-DVGW (probe compliant to DVGW W 294-3(2006))

UV-Air[®] Probe with 4-20mA Output and UVC Photodiode (SiC)


Part Number: UV_Air_C_AMP4-20mA_cable




Technical Data (T_a = 25 °C)

Parameter	Symbol	Value	Unit
Power supply	V _B	24	V
Output signal	I _{OUT}	4....20	mA
Power consumption	I _{max}	<30	mA
Linearity	L	2	%
Temperature drift	ΔT	0,03	W/m ² /K
Wavelength of max. sensitivity	λ _{Smax}	270	nm
Sensitivity range(S=0.1*S _{max})	–	230-285	nm

Spectral Sensitivity (photodiode SG01S-C18)

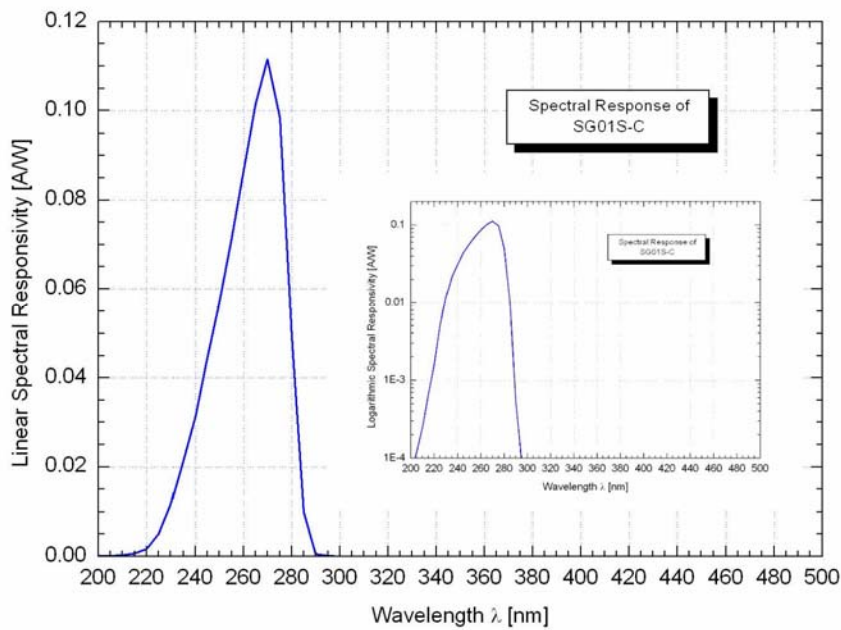

Dimensions



UV-Air[®] Probe with 4-20mA Output and UVC Photodiode (SiC)

Part Number: UV_Air_C_AMP4-20mA_cable



configuration:

brown: 0

white: V₊