

UV-Water Probe with 4-20mA Output and UVC Photodiode (SiC)

Part Number: UV_Water_C_AMP4-20mA_plug



Our probes of the **UV-Water** series are characterized by their 10bar water pressure resistance. They are well suited for measurements under water. The ¼" thread allows comfortable mounting at the measuring point.



UV_Water_C_AMP4-20mA_plug

Features of Typs UV_Water_C_AMP4-20mA_plug :

- only for UVC measurement, e.g. for purification control, spectral sensitivity according to DVGW W294-3
- filtered, silicon carbide based UV photodiode for extreme radiation hardness
- integrated amplifier with 0..5V voltage output
- offset and amplification factor are adjustable
- stainless steel housing with 10bar water pressure resistance
- with ¼"-thread for comfortable mounting
- 5 pin sensor connector (connection e.g. Hirschmann ELKA 5012)
- customized cable available

Probes from the **UV-Water** series are available with the following details:

<i>Sensortype</i>	<i>Part Number</i>
with broadband photodiode	UV_Water_ABC_Design
with UVC photodiode DVGW W 294-3	UV_Water_C_Design
with Erythema Sensor DIN 5050 ISO 17166/CIE S 007/E	UV_Water_UV-Index_Design

<i>Design</i>	<i>Part Number</i>
with 4-20mA output and 2m cable	UV_Water_Sensortype_AMP4-20mA_cable
with 4-20mA output and 5 pin connector	UV_Water_Sensortype_AMP4-20mA_plug
with 0-5V output and 2m cable	UV_Water_Sensortype_AMP0-5V_cable
with 0-5V output and 5 pin connector	UV_Water_Sensortype_AMP0-5V_plug
without amplifier and with 2m cable	UV_Water_Sensortype_cable
without amplifier and with 5 pin connector	UV_Water_Sensortype_plug

UV-Water Probe with 4-20mA Output and UVC Photodiode (SiC)

Part Number: UV_Water_C_AMP4-20mA_plug




Please consider the following probe series:

- UV-Air (compact stainless steel probe)
- UV-Cosine (with cosine correction and wide angle characteristics)
- UV-DVGW (probe according to DVGW W 294-3(2006))

Technical Data (T_a = 25 °C)

Parameter	Symbol	Value	Unit
Power supply	V _B	24	V
Output signal	I _{OUT}	4...20	mA
Power consumption	I _{max}	<30	mA
Linearity	L	2	%
Temperature drift	ΔT	0,03	W/m ² /K
Wavelength of max. sensitivity	λ _{Smax}	270	nm
Sensitivity range(S=0.1*S _{max})	-	230 – 285	nm

Spectral Sensitivity (Photodiode SG01S)

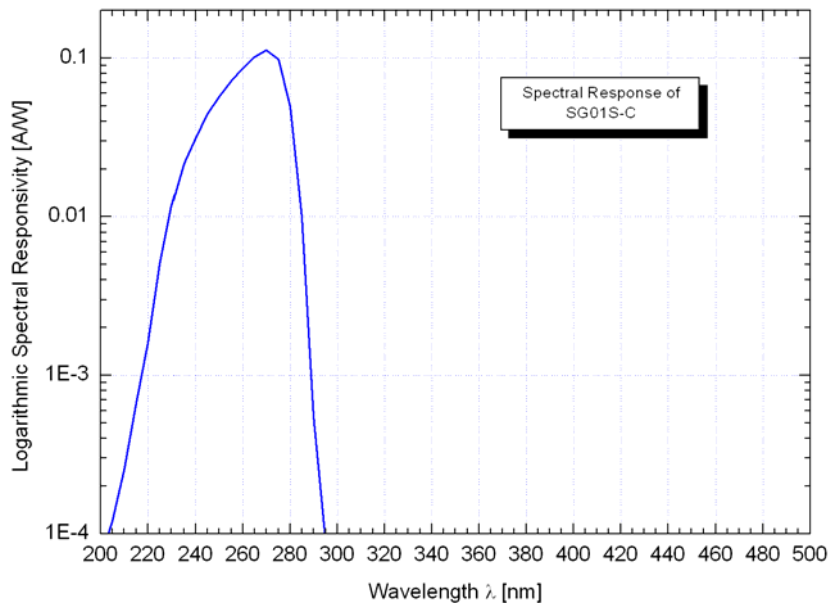

Country of origin : Germany

Seite 2 [3]

[PRC Technologies Corporation Ltd.](#)

328/65 Ladprao 87 Rd, Wangthonglang, Bangkok 10310


T: +662 530-1714, 530-1619, 530-1621; F: +662 530-1731

UV-Water Probe with 4-20mA Output and UVC Photodiode (SiC)

Part Number: UV_Water_C_AMP4-20mA_plug



Dimensions

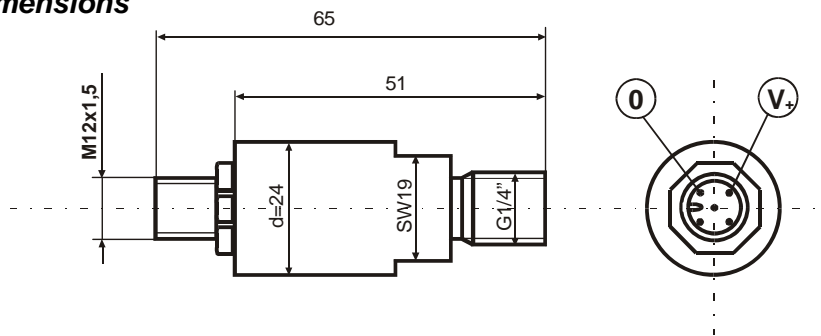

Country of origin : Germany

Seite 3 [3]

[PRC Technologies Corporation Ltd.](#)

328/65 Ladprao 87 Rd, Wangthonglang, Bangkok 10310

T: +662 530-1714, 530-1619, 530-1621; F: +662 530-1731