



CLEO Compact PL- L 36W/P 2G11 1CT

Product family description
Tubular compact 'spaghetti' lamps

Product Features

- Emit highly concentrated UV radiation in the 300 - 400 nm range
- Choice of 2 different UV- B/UV- A ratios: 1.2% and 2.3% (UV- B: 280 - 315 nm); or 2.1% and 3.5% (UV- B: 280 - 320 nm)
- R (Reflector) lamps have a 200° internal reflector
- Compact, single- ended PL- L lamp consists of two single- ended fused together with a 4- pin lamp base
- PL- L has UV- B/UV- A ratio of 1.2% (UV- B: 280 - 315 nm), or 2.1% (UV- B: 280 - 320 nm)
- PL- L should be operated with a standard 36W/40W fluorescent ballast combined with an S10 starter

Application

- Suntanning/skin pigmentation
- Insect traps
- Photochemical processes

Product data


Order code	642646 40
Full product code	871150064264640
Full product name	CLEO Compact PL- L 36W/P 2G11 1CT
Order product name	CLEO Compact PL- L 36W/P 2G11 1CT/25
Packing type	1 Carton
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500642646
Bar code on intermediate packing - EAN2	
Bar code on outerbox - EAN3	8711500642653
Logistic code(s) - 12NC	9279 046 00907
ILCOS code	
Net weight per piece	104.000 GR
Successor order code	

PHILIPS


Product data	
Cap- Base	2G11
Cap- Base Information	4 Pins
Bulb	2xT16
Execution	-
Main Application	Suntanning
Name Extension	Compact PL- L
Packing Type	1CT [1 Carton]
Packing Configuration	25
Useful Life	500 hr
Life to 50% failures	2000 hr
Product Nett Weight	114.1 gr
Rated Lamp Wattage	36W
Technical Lamp Power	36 W
Lamp Voltage	105 V
Lamp Current	0.435 A
Colour Code	09P [09 Pink]
Colour Designation (text)	Pink
UV Effective Power $\leq 320\text{nm}$	8.5 mW
UV Effective Power $> 320\text{nm}$	7.1 mW
UV- B/UV- A (IEC)	1.0 %
UV- A Power (IEC)	8.9 W




CLEO

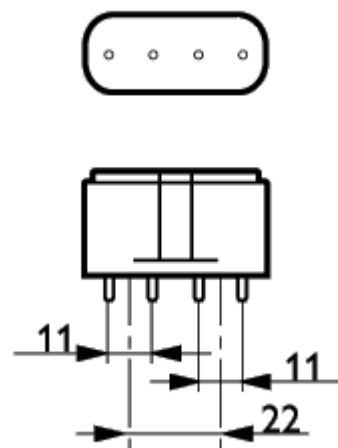


Cap- Base 2G11

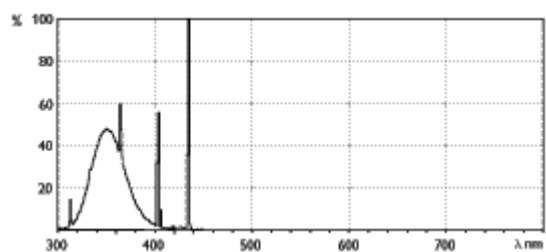

CLEO/09/P

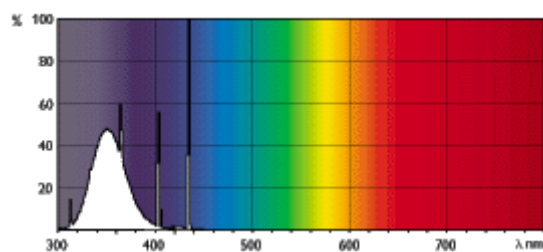

CLEO/09/P

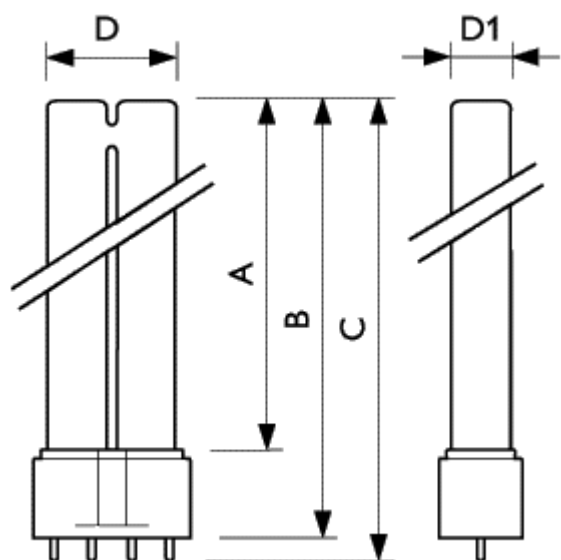

CLEO

	A	B	C	D	D1
Full product name	Max	Max	Max	Max	Max
CLEO Compact PL-L 36W/P 2G11 1CT	384.2	410	416.6	39	18

