

UV-Water Probe with 0-5V Output and Broadband SiC Photodiode

Part Number: UV_Water_ABC_AMP0-5V_plug



Our probes of the **UV-Water** series are characterized by their 10bar water pressure resistance. They are well suited for measurements under water. The 1/4" thread allows comfortable mounting at the measuring point.



UV_Water_ABC_AMP0-5V_plug

Features of Typs UV_Water_ABC_AMP0-5V_plug :

- **broadband UVA-UVB-UVC-measurement (see spectral curve p.2)**
- **Silicon Carbide based Photodiode (SiC) for extreme radiation hardness**
- **integrated amplifier with 0..5V voltage output**
- **offset and amplification factor are adjustable**
- **stainless steel housing with 10bar water pressure resistance**
- **with 1/4"-thread for comfortable mounting**
- **5 pin sensor connector (connection e.g. Hirschmann ELKA 5012)**
- **customized cable available**

Probes from the **UV-Water** series are available with the following details:

<i>Sensortype</i>	<i>Part Number</i>
with broadband photodiode	UV_Water_ABC_Design
with UVC photodiode DVGW W 294-3	UV_Water_C_Design
with Erythema Sensor DIN 5050 ISO 17166/CIE S 007/E	UV_Water_UV-Index_Design

<i>Design</i>	<i>Part Number</i>
with 4-20mA output and 2m cable	UV_Water_Sensortype_AMP4-20mA_cable
with 4-20mA output and 5 pin connector	UV_Water_Sensortype_AMP4-20mA_plug
with 0-5V output and 2m cable	UV_Water_Sensortype_AMP0-5V_cable
with 0-5V output and 5 pin connector	UV_Water_Sensortype_AMP0-5V_plug
without amplifier and with 2m cable	UV_Water_Sensortype_cable
without amplifier and with 5 pin connector	UV_Water_Sensortype_plug

Please consider the following probe series:

UV-Water Probe with 0-5V Output and Broadband SiC Photodiode

Part Number: UV_Water_ABC_AMP0-5V_plug




- UV-Air (compact stainless steel probe)
- UV-Cosine (with cosine correction and wide angle characteristics)
- UV-DVGW (probe according to DVGW W 294-3(2006))

Technical Data (T_a = 25 °C)

Parameter	Symbol	Value	Unit
Power supply	V _B	+7...24	V
Output signal	V _{OUT}	0...5	V
Power consumption	I _{max}	<30	mA
Linearity	L	2	%
Temperature drift	ΔT	0,03	W/m ² /K
Wavelength of max. sensitivity	λ _{Smax}	285	nm
Sensitivity range(S=0.1*S _{max})	-	225 - 380	nm

Spectral Sensitivity (Photodiode SG01S)

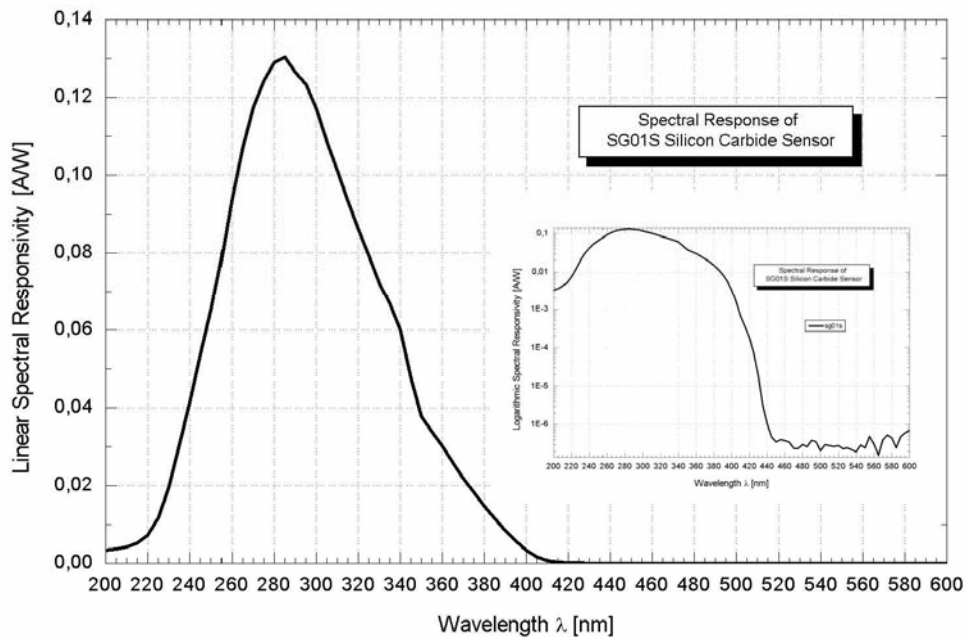

UV-Water Probe with 0-5V Output and Broadband SiC Photodiode

Part Number: UV_Water_ABC_AMP0-5V_plug



Dimensions

